











# The HD Series

HD 302 / HD 302 YF






## CHARACTERISTICS

	HD 302	HD 302 YF
	SCH302R	SCH302H
TYPE OF REFRIGERANT		
 AUTOMATIC WORKING CYCLE No manual taps	•	•
 HIGH PRECISION RECOVERY FUNCTION	•	•
AUTOMATIC OIL INJECTION refillable/hermetic bottles ( <b>OIL LOCK</b> )	•	•
 AUTOMATIC DYE INJECTION refillable/hermetic bottles ( <b>OIL LOCK</b> ) O-PK00096	✓	✓
HEATER BELT INCLUDED	•	•
USB PORT	•	•
INTERNAL DATA BASE including commercial and agricultural vehicles	•	•
 INTEGRATED AUTOMATIC NITROGEN AND FORMING GAS LEAK CHECK ( <b>CFU-NITRO / CFU-NITRO.HD.XX</b> )	✓	✓
 CAN BE USED WITH HYBRID OR ELECTRIC VEHICLES (quick oil decontamination function) I	•	•
 INTERNAL FLUSHING	•	•
 A/C SYSTEM PROFESSIONAL FLUSHING ( <b>ACC-FLUSHING / ACC-EASYFLUSH PLUS</b> )	✓	✓
 A/C SYSTEM DIAGNOSYS	•	•
 CONFIGURABLE GAS TYPE from HF01234YF to --> R134a O-PK00097		•
 BLUETOOTH CONNECTION APP OKSY <sup>®</sup> GEN+	•	•



• STANDARD SUPPLY ✓ OPTION

## ACCESSORI


	CODICE	DESCRIZIONE	HD 322	HD 322 YF
	ACC-88.072	Gas bottle adapter ¼	✓	
	ACC-88.011	Straight adapter HP ¼	✓	
	ACC-88-289H	Universal bottle adapter HF01234YF		✓
	GEAR PUMP	Gear pump 1 L/min.	✓	✓
	O-PK00051 O-PK00051 OPZ	Printer kit	•	•
	GAS ID GAS ID OPZ	SAE J 2843 internal HF01234YF refrigerant identifier kit	✓	✓



## NITROGEN LEAK CHECK OR HYDRO-NITROGEN

CODE

CFU-NITRO

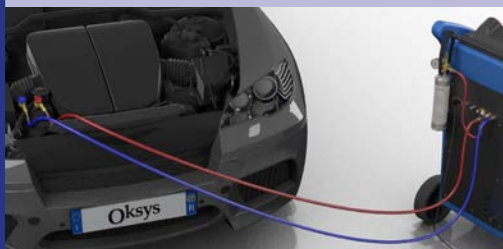


Kit for the connection of 1 or 2.2 liter cylinders to the A/C station - Including:

- Carrying case
- Pressure reducer for 1 and 2.2 liter bottles
- Manifold for the A/C service station connection

CODE

CFU-NITRO.HD.XX

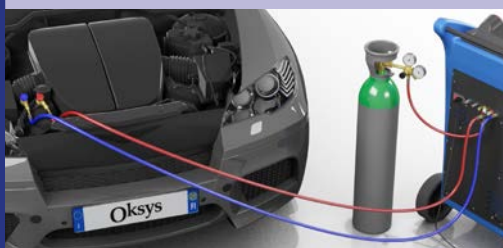


Kit for connection of 200 bar bottle to A/C Station - Inclusive of:

- Carrying case
- Pressure reducer 200 Bar
- Adapter for the connection to 1 and 2,2 L bottles
- Manifold for the A/C service station connection

## FLUSHING

CODE

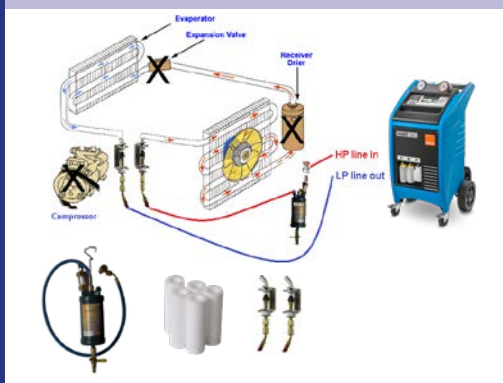ACC-FLUSHING  
ACC-FLUSHING.YF

Professional Refrigerant R134a or 1234yf Flushing Kit. Including expansion cylinder.

## RANGE

R134a



R1234yf



MODEL

HD 302

HD 302 YF

## TECHNICAL FEATURES

Display	Graphic LCD 264x64 Pixel	Graphic LCD 264x64 Pixel
Full Recovery Function	YES	YES
Tank Capacity	40 Kg	40 Kg
Heater Belt	YES	YES
Scale Accuracy	+/- 5 g	+/- 5 g
Compressor	20 cc	20 cc
Vacuum Pump	200 L/min Dual Stage	200 L/min Dual Stage
Air Purge	Automatic	Automatic
Power Supply	220V 50 Hz	220V 50 Hz
Dimensions	55x60x120 cm	55x60x120 cm
Weight	117 Kg	126 Kg
Packaging dimensions	80x60x145 cm	80x60x145 cm

## SCOPE OF DELIVERY

Hp LP Quick Couplers	Included	Included
Hoses	3 m	3 m
Blanket	NO	NO
Power Cord	YES	YES
Calibration Handle	YES	YES
Extra oil bottle	YES	YES
2 x temperature probes	Included	Included



Oksys

TOTAL DESIGN FOR  
BEST PERFORMANCE