



# AGRICOLD



## AGRICOLD 302 / AGRICOLD 302 YF

### CHARACTERISTICS

|  | AGRICOLD 302 | AGRICOLD 302 YF |
|--|--------------|-----------------|
|  | SCG302R      | SCG302H         |
|  |              |                 |
| TYPE OF REFRIGERANT  |              |                 |
| AUTOMATIC WORKING CYCLE<br>No manual taps  | •            | •               |
| HIGH PRECISION RECOVERY FUNCTION   | •            | •               |
| AUTOMATIC OIL INJECTION<br>refillable/hermetic bottles ( <b>OIL LOCK</b> )                         | •            | •               |
| AUTOMATIC DYE INJECTION<br>refillable/hermetic bottles ( <b>OIL LOCK</b> )                         | ✓            | ✓               |
| HEATER BELT INCLUDED   | •            | •               |
| USB PORT   | •            | •               |
| INTERNAL DATA BASE<br>including commercial and agricultural vehicles                               | •            | •               |
| INTEGRATED AUTOMATIC NITROGEN AND FORMING GAS<br>LEAK CHECK ( <b>CFU-NITRO / CFU-NITRO.HD.XX</b> ) | ✓            | ✓               |
| INTERNAL FLUSHING  | •            | •               |
| READY TO USE ON HYBRID OR ELECTRIC CARS<br>with rapid oil decontamination system                   | •            | •               |
| A/C SYSTEM PROFESSIONAL FLUSHING<br>( <b>ACC-FLUSHING</b> )  | ✓            | ✓               |
| A/C SYSTEM DIAGNOSYS   | •            | •               |
| CONFIGURABLE GAS TYPE<br>from HFO1234YF to --> R134a   |              | •               |
| BLUETOOTH CONNECTION<br>APP OKSY <sup>®</sup> GEN+   | •            | •               |



• STANDARD SUPPLY ✓ OPTION

### ACCESSORIES

|  | CODE                       | DESCRIPTION                        | AGRICOLD 302 | AGRICOLD 302 YF |
|--|----------------------------|------------------------------------|--------------|-----------------|
|  | ACC-88.072                 | Gas bottle adapter 1/4             | ✓            |                 |
|  | ACC-88.011                 | Straight adapter HP 1/4            | ✓            |                 |
|  | ACC-88-289H                | Universal bottle adapter HFO1234YF |              | ✓               |
|  | O-PK00051<br>O-PK00051 OPZ | Printer kit                        | ✓            | ✓               |
|  | OAC0002-KIT                | 12 V Power supply                  | ✓            | ✓               |



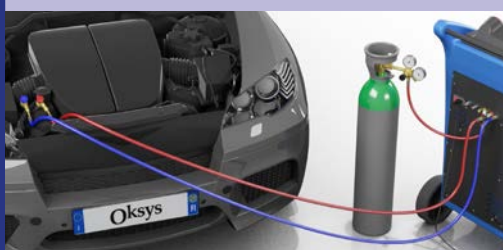
1/2021

## NITROGEN LEAK CHECK OR HYDRO-NITROGEN

**CODE** CFU-NITRO

Kit for the connection of 1 or 2.2 liter cylinders to the A/C station - Including:

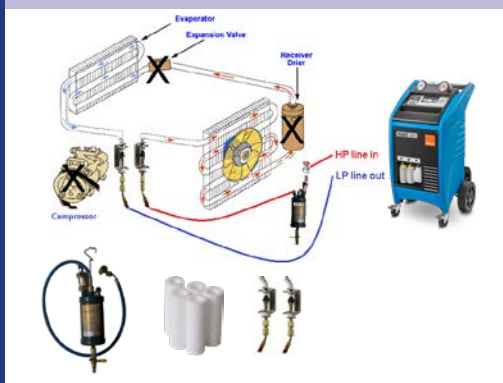
- Carrying case
- Pressure reducer for 1 and 2.2 liter bottles
- Manifold for the A/C service station connection

**CODE** CFU-NITRO.HD.XX

Kit for connection of 200 bar bottle to A/C Station - Inclusive of:

- Carrying case
- Pressure reducer 200 Bar
- Adapter for the connection to 1 and 2,2 L bottles
- Manifold for the A/C service station connection

## FLUSHING

**CODE** ACC-FLUSHING  
ACC-FLUSHING.YF

Professional Refrigerant R134a or 1234y Flushing Kit. Including expansion cylinder.

## RANGE

R134a



R1234yf

**MODEL****AGRICOLD 302****AGRICOLD 302 YF**

### TECHNICAL FEATURES

|                               |                          |                          |
|-------------------------------|--------------------------|--------------------------|
| <b>Display</b>                | Graphic LCD 264x64 Pixel | Graphic LCD 264x64 Pixel |
| <b>Full Recovery Function</b> | YES                      | YES                      |
| <b>Tank Capacity</b>          | 12 Kg                    | 12 Kg                    |
| <b>Heater Belt</b>            | YES                      | YES                      |
| <b>Scale Accuracy</b>         | +/- 5 g                  | +/- 5 g                  |
| <b>Compressor</b>             | 10 cc                    | 10 cc                    |
| <b>Vacuum Pump</b>            | 100 L/min                | 100 L/min                |
| <b>Air Purge</b>              | Automatic                | Automatic                |
| <b>Power Supply</b>           | 220V 50 Hz 12V DC        | 220V 50 Hz 12V DC        |
| <b>Dimensions</b>             | 55x63x86 cm              | 48x68x88 cm              |
| <b>Weight</b>                 | 62/71 Kg                 | 62/71 Kg                 |
| <b>Packaging dimensions</b>   | 68x57x100 cm             | 68x57x100 cm             |

### SCOPE OF DELIVERY

|                               |          |          |
|-------------------------------|----------|----------|
| <b>Hp LP Quick Couplers</b>   | Included | Included |
| <b>Hoses</b>                  | 7,5 m    | 7,5 m    |
| <b>Blanket</b>                | NO       | NO       |
| <b>Power Cord</b>             | YES      | YES      |
| <b>Calibration Handle</b>     | YES      | YES      |
| <b>Extra oil bottle</b>       | Option   | Option   |
| <b>2 x temperature probes</b> | NO       | NO       |

**Oksys****TOTAL DESIGN FOR BEST PERFORMANCE**