



# FAST 342



FAST 342 / FAST 342 YF

## CHARACTERISTICS

	FAST 342	FAST 342 YF
	SCF342R	SCF342H
TYPE OF REFRIGERANT		
AUTOMATIC WORKING CYCLE No manual taps	•	•
HIGH PRECISION RECOVERY FUNCTION	•	•
AUTOMATIC OIL INJECTION with scale and refillable/hermetic bottles ( <b>OIL LOCK</b> )	•	•
AUTOMATIC DYE INJECTION with scale and refillable/hermetic bottles ( <b>OIL LOCK</b> )	•	•
HEATER BELT INCLUDED	•	•
USB PORT	•	•
INTERNAL DATA BASE including commercial and agricultural vehicles	•	•
INTEGRATED AUTOMATIC NITROGEN AND FORMING GAS LEAK CHECK ( <b>CFU-NITRO/CFU-NITRO.HD.XX/CFU-NITRO.REDUCER</b> )	•	•
STATUS INDICATORS	•	•
READY TO USE ON HYBRID OR ELECTRIC CARS with rapid oil decontamination system	•	•
INTERNAL FLUSHING	•	•
A/C SYSTEM PROFESSIONAL FLUSHING ( <b>ACC-FLUSHING / ACC-EASYFLUSH PLUS</b> )	✓	✓
A/C SYSTEM DIAGNOSYS	•	•
CONFIGURABLE GAS TYPE from HF01234YF to --> R134a	•	•
BLUETOOTH CONNECTION APP OKSY <sup>®</sup> GEN+	•	•



• STANDARD SUPPLY ✓ OPTION

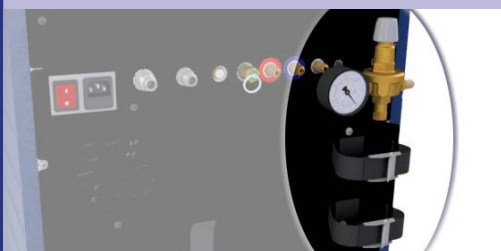
## ACCESSORIES

	CODE	DESCRIPTION	FAST 342	FAST 342 YF
	ACC-88.072	Gas bottle adapter ¼	✓	
	ACC-88.011	Straight adapter HP ¼	✓	
	ACC-88-289H	Universal bottle adapter HF01234YF		✓
	O-PK00051 O-PK00051 OPZ	Printer kit	•	•
	GAS ID GAS ID OPZ	SAE J 2843 internal HF01234YF refrigerant identifier kit	✓	✓
	ACC-BLK-FAST300	Antidust Blanket	•	•



1/2021

## NITROGEN LEAK CHECK OR HYDRO-NITROGEN

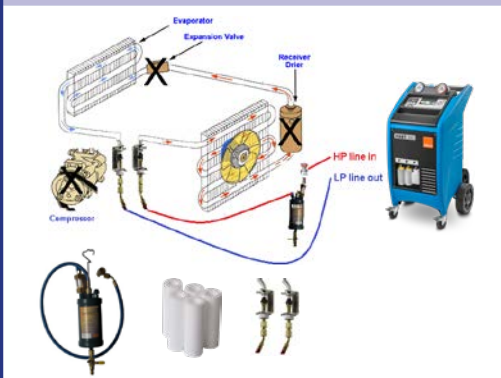
**CODE** CFU-NITRO.REDUCER

Kit to connect 1 or 2.2 liter bottle pressure reducer and hose to FAST 342

**CODE** CFU-NITRO.HD.XX

Kit for connection of 200 bar bottle to A/C Station  
- Inclusive of:  
• Carrying case  
• Pressure reducer 200 Bar  
• Adapter for the connection to 1 and 2,2 L bottles  
• Manifold for the A/C service station connection

## FLUSHING

**CODE** ACC-FLUSHING  
ACC-FLUSHING.YF

Professional Refrigerant R134a or 1234y Flushing Kit. Including expansion cylinder.

**CODE** ACC-EASYFLUSH PLUS

Visual Diagnostic Kit for A/C flushing

# RANGE

R134a



R1234yf

**MODEL**

FAST 342

FAST 342 YF

### TECHNICAL FEATURES

<b>Display</b>	Graphic LCD 264x64 Pixel	Graphic LCD 264x64 Pixel
<b>Full Recovery Function</b>	YES	YES
<b>Tank Capacity</b>	18 Kg	12 Kg
<b>Heater Belt</b>	YES	YES
<b>Scale Accuracy</b>	+/- 5 g	+/- 5 g
<b>Compressor</b>	10 cc	10 cc
<b>Vacuum Pump</b>	100 l/min	100 L/min
<b>Air Purge</b>	Automatic High Precision	Automatic High Precision
<b>Power Supply</b>	220V 50 Hz	220V 50 Hz
<b>Dimensions</b>	58x55x120 cm	58x55x120 cm
<b>Weight</b>	67/76 Kg	65/74 Kg
<b>Packaging dimensions</b>	63x63x123 cm	63x63x123 cm

### SCOPE OF DELIVERY

<b>Hp LP Quick Couplers</b>	Included	Included
<b>Hoses</b>	3m	3m
<b>Blanket</b>	YES	YES
<b>Power Cord</b>	YES	YES
<b>Calibration Handle</b>	YES	YES
<b>Extra oil bottle</b>	YES	YES
<b>2 x temperature probes</b>	Included	Included

**Oksys**TOTAL DESIGN FOR  
BEST PERFORMANCE