



HD

HD 302 / HD 302 YF

CHARACTERISTICS



	HD 302	HD 302 YF
	SCH302R	SCH302H
TYPE OF REFRIGERANT		
AUTOMATIC WORKING CYCLE No manual taps	●	●
HIGH PRECISION RECOVERY FUNCTION	●	●
AUTOMATIC OIL INJECTION with scale	●	●
AUTOMATIC DYE INJECTION with scale	✓	✓
HEATER BELT INCLUDED	●	●
USB PORT	●	●
INTERNAL DATA BASE including commercial and agricultural vehicles	●	●
INTEGRATED AUTOMATIC NITROGEN AND FORMING GAS LEAK CHECK (CFU-NITRO/CFU-NITRO.HD.XX)	✓	✓
READY TO USE ON HYBRID OR ELECTRIC CARS with rapid oil decontamination system	●	●
INTERNAL FLUSHING	●	●
A/C SYSTEM PROFESSIONAL FLUSHING (ACC-FLUSHING / ACC-EASYFLUSH PLUS)	✓	✓
A/C SYSTEM DIAGNOSYS		
CONFIGURABLE GAS TYPE from HFO1234YF to --> R134a		●
BLUETOOTH CONNECTION APP OKSY ^s GEN+	●	●



● STANDARD SUPPLY ✓ OPTION

ACCESSORIES

			HD 322	HD 322 YF
	CODICE ACC-88.072	DESCRIZIONE Gas bottle adapter ¼	✓	
	ACC-88.011	Straight adapter HP ¼	✓	
	ACC-88-289H	Universal bottle adapter HFO1234YF		✓
	GEAR PUMP	Gear pump 1 L/min.	✓	✓
	O-PK00051 O-PK00051 OPZ	Printer kit	●	●



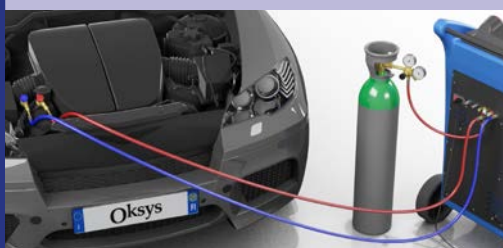
1/2021

NITROGEN LEAK CHECK OR HYDRO-NITROGEN

CODE CFU-NITRO

Kit for the connection of 1 or 2.2 liter cylinders to the A/C station - Including:

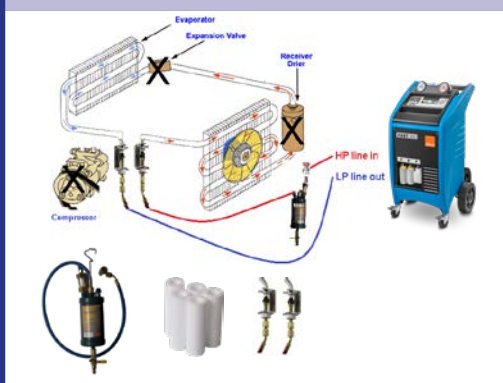
- Carrying case
- Pressure reducer for 1 and 2.2 liter bottles
- Manifold for the A/C service station connection

CODE CFU-NITRO.HD.XX

Kit for connection of 200 bar bottle to A/C Station - Inclusive of:

- Carrying case
- Pressure reducer 200 Bar
- Adapter for the connection to 1 and 2,2 L bottles
- Manifold for the A/C service station connection

FLUSHING

CODE ACC-FLUSHING
ACC-FLUSHING.YF

Professional Refrigerant R134a or 1234y Flushing Kit. Including expansion cylinder.

CODE ACC-EASYFLUSH PLUS

Visual Diagnostic Kit for A/C flushing

RANGE

R134a



R1234yf

**MODEL**

HD 322

HD 322 YF

TECHNICAL FEATURES

Display	Graphic LCD 264x64 Pixel	Graphic LCD 264x64 Pixel
Full Recovery Function	YES	YES
Tank Capacity	40 Kg	30 Kg
Heater Belt	YES	YES
Scale Accuracy	+/- 5 g	+/- 5 g
Compressor	20 cc	20 cc
Vacuum Pump	200 l/min	200 L/min
Air Purge	Automatic	Automatic
Power Supply	220V 50 Hz	220V 50 Hz
Dimensions	55x60x120 cm	55x60x120 cm
Weight	117/126 Kg	117/126 Kg
Packaging dimensions	80x60x145 cm	80x60x145 cm

SCOPE OF DELIVERY

Hp LP Quick Couplers	Included	Included
Hoses	3m	3m
Blanket	NO	NO
Power Cord	YES	YES
Calibration Handle	YES	YES
Extra oil bottle	YES	YES
2 x temperature probes	Included	Included

**Oksys****TOTAL DESIGN FOR BEST PERFORMANCE**